

## 2 Metre Straight Plaster-in Aluminium LED Profile 55.5 × 13mm

Trimless plaster-in channel for LED strip up to 12mm, straight runs.

### SPECIFICATION

|                |                                  |
|----------------|----------------------------------|
| Profile type   | Straight plaster-in channel      |
| Section        | 55.5mm flange · 15.1 × 13mm body |
| Length         | 2 metres                         |
| LED strip size | Up to 12mm (12.5mm channel)      |
| Material       | Anodised aluminium               |
| Finish         | Silver anodised                  |
| Diffuser       | Opal, supplied                   |
| IP rating      | IP20 — dry indoor only           |
| Mounting       | Plaster-in, recessed             |
| Form           | Straight runs only               |
| Weight         | 520g                             |
| Guarantee      | 7 years                          |



### IN THE BOX

- 1 × 2m profile
- 1 × front cap
- 1 × 2m opal diffuser
- 1 × end cap


### DESCRIPTION

A 2 metre plaster-in channel for LED strip up to 12mm wide, in a 55.5 × 13mm aluminium section with a 12.5mm channel 8.8mm deep. At 13mm high it needs only a shallow void behind the board, so it suits ceilings and walls where depth is tight.

Two of these cover a 4 metre ceiling with a single join; 1 metre lengths would need three. Fix to the framing before boarding, cut the board to butt the flange and skim across it so the light line reads as a slot in the plaster.

Fit the opal cover after plastering and decorating, never before: wet plaster dries hard in the retaining lips and the cover will not seat. IP20 rules out bathrooms and outdoor positions.

### DIMENSIONS

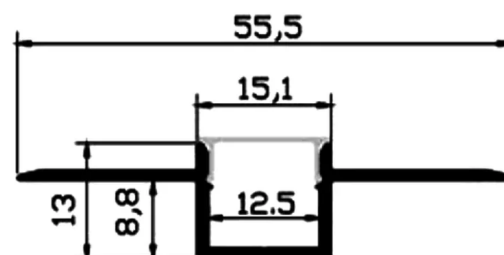

Cross-section — all dimensions in millimetres

If you require any advice for your project, feel free to get in touch — our technical team is here Monday to Friday, 9am–5pm on

UK LED Lights Ltd | Unit D4, Stafford Park 4, Telford TF3 3BA | 01952 370008 | sales@ukledlights.co.uk | www.ukledlights.co.uk