

# 6x12mm Horizontal Bend Neon Flex

Golden | 12V DC | 10mm (1cm) cut | 5m maximum run

**12V DC**

Voltage

**6x12mm**

Body size

**10mm**

Cut interval

**5m**

Maximum run

**Horizontal**

Bending

## SPECIFICATIONS

|                       |                        |
|-----------------------|------------------------|
| Light colour          | Golden                 |
| Supply voltage        | 12V DC                 |
| Order lengths         | 1-5m                   |
| Body dimensions       | 6x12mm                 |
| Cut interval          | 10mm (1cm)             |
| Maximum run           | 5m                     |
| Bending               | Horizontal / Side Bend |
| Light surface         | Domed top              |
| Material              | Silicone               |
| Body IP rating        | IP65                   |
| Power per metre       | Approx. 6.5 W/m        |
| Lumens per metre      | 327 lm/m               |
| LED type              | SMD 2835               |
| LEDs per metre        | 120                    |
| Warranty              | 2 Years*               |
| Average lifetime      | 50,000 hours           |
| Operating temperature | -25°C to +45°C         |



Silicone construction illustration


### Domed light surface

Golden coating covers the rounded top diffuser; sidewalls are opaque white. Light emits from the domed surface. Form smooth horizontal curves without twisting.

\* 2 Years indoors; 1 Year for sheltered outdoor light-splash use.

Made to measure and custom cut to your specific requirements, within the permitted cut marks and maximum run.

## DIMENSIONS



### 6mm wide. 12mm overall height.

The crown is rounded and the base is flat. Dimensions describe the neon body; allow additional space for the actual cap and mounting system.

Illustrations are schematic and not to scale. Certification details must be confirmed for the installation.

# 6x12mm Horizontal Bend Neon Flex


Golden | 12V DC | 10mm (1cm) cut | 5m maximum run

## PERFORMANCE & INSTALLATION OVERVIEW

|                   |                                     |
|-------------------|-------------------------------------|
| Power per metre   | Approximately 6.5 W/m               |
| Lumens per metre  | 327 lm/m                            |
| Beam angle        | 180 degrees                         |
| CRI (white light) | Not applicable to this fixed colour |

Optical values, where shown, are the existing product-specific catalogue ratings, not new laboratory measurements.


## 12V DC CONNECTION

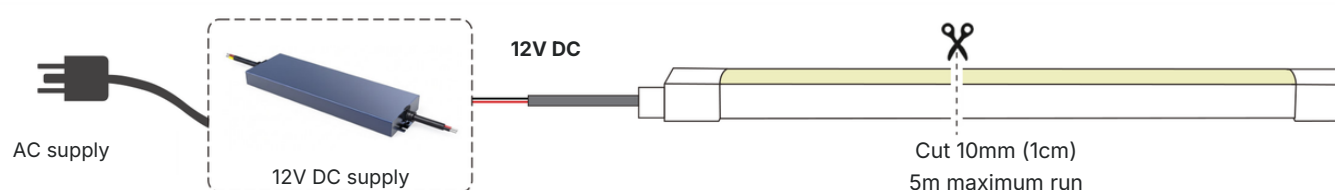

Supply illustration is an example, not an included model or an IP rating. Use a compatible 12V DC constant-voltage supply and two-wire + / - connection.

Isolate power before cutting or connecting. Never connect this 12V light directly to mains. Fully unroll before energising and keep each continuous run within 5m.

## HORIZONTAL BENDING



Horizontal / Side Bend



Do not twist



Do not bend vertically

The listed maximum-bending value is 2cm; its radius/diameter basis is unspecified. Confirm the actual minimum radius before forming tight curves. IP67 bend limits are not transferred.

## 6x12mm Horizontal Bend Neon Flex

Golden | 12V DC | 10mm (1cm) cut | 5m maximum run

### CONNECTIONS & PREPARATION

Use a matching domed feed cap with front-exit wires and a closed tail cap. Confirm cap fit, polarity and the sealing process against the actual 6x12mm IP65 kit.



Front feed fitting - reference example



Closed tail fitting - reference example

The IP67 fitting photographs show accessory types, not a compatibility or protection claim for the IP65 body. Keep the power lead exiting the front face of the actual rounded cap.

### MEASURE, THEN CUT AT THE MARK



Measure before cutting



Cut only at the actual marked position

This listing uses 10mm (1cm) cut marks. Isolate power, cut squarely and reseal the end using the matching kit. Photographs illustrate the action only.

### CABLE LENGTH CHOICES

|                  |                                |
|------------------|--------------------------------|
| 0.2m (20cm)      | Included                       |
| 1m, 2m, 4m or 5m | Optional; select when ordering |

The IP65 body is not submersible. Every cut end and cable entry needs a correctly fitted seal.


# 6x12mm Horizontal Bend Neon Flex

Golden | 12V DC | 10mm (1cm) cut | 5m maximum run

## MOUNTING & ESSENTIAL HANDLING





Channel example




Clip example

Select supports that fit the domed 6x12mm IP65 body. Confirm cap clearance and substrate fixings; IP67 accessory sizes are not assumed compatible.


## INSTALLATION METHODS & FIXING POSITIONS

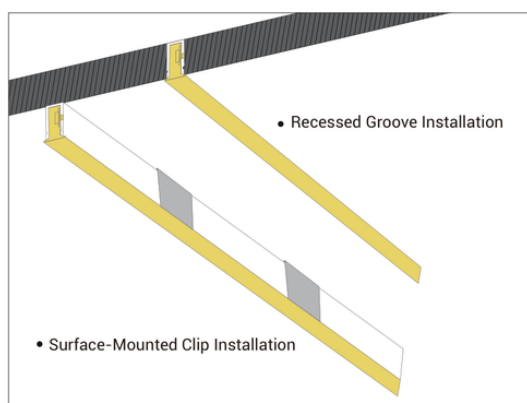

Flush / recessed




Proud head: wrong



Angled screw: wrong

Fix the empty support first. Keep screw heads straight and flush or recessed. Deburr edges and remove swarf before inserting the neon.

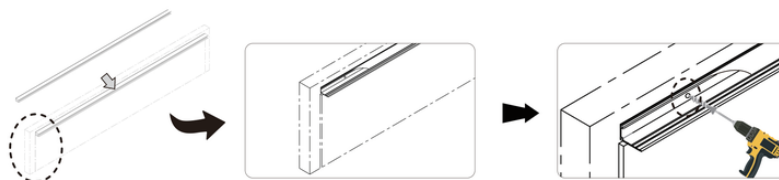

Insert progressively by hand from one end. Keep the domed face upright; do not trap a hump, pull the cable or force a cap into the channel.

Cutting, connection, sealing, curing and troubleshooting: [Install12-0612-C10.pdf](#)