

Warm White 3000K COB LED Strip 24V 8mm 480LEDs/m IP20 20m Run

Dot-free 8mm COB strip, 7.5 W/m, 20m single feed


7 YEARS WARRANTY	IP20 IP RATING	20M MAX RUN	50mm CUT POINTS	90+ HIGH CRI	3000K COLOUR TEMP	24V DC
------------------------	-------------------	----------------	--------------------	-----------------	----------------------	-----------

SPECIFICATION

LED type	COB (chips on FPC)
Voltage	24V DC constant voltage
Section	8mm x 2mm
LEDs per metre	480
Colour temperature	3000K
Luminous flux	677 lm/m
Power	7.5 W/m
Efficacy	90 lm/W
CRI	>90, SDCM <3
Cut points	Every 50mm
Supplied	Cut to your specified length
Adhesive	3M Adhesive tape
Maximum run	20m single feed
IP rating	IP20 — dry indoor only
Certification	UKCA, CE, RoHS, UL
Guarantee	7 years



CHOOSING A COLOUR TEMPERATURE

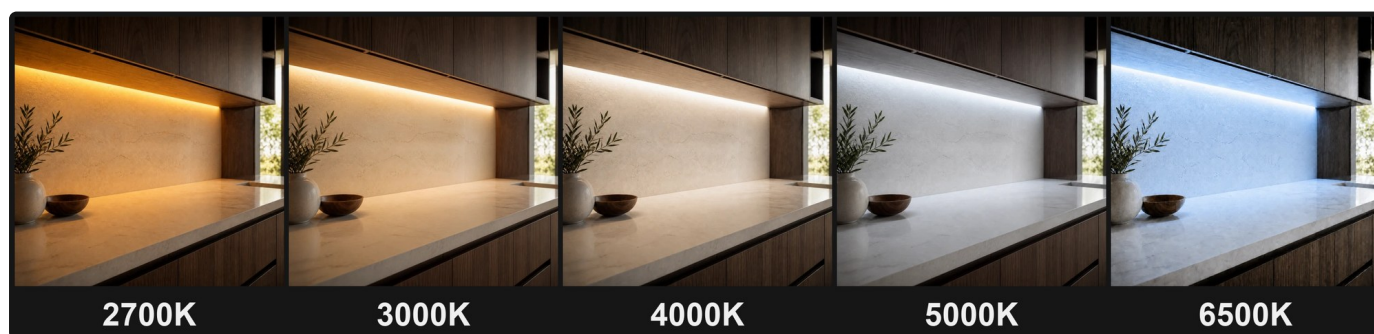


The same kitchen lit by each colour temperature in this range

2700K	The warmest in the range, closest to filament. Living rooms, bedrooms, hospitality.	3000K	Warm without going amber. The usual choice for kitchens and stair coving.
4000K	Neutral. Reads colours honestly, so it suits worktops, wardrobes and retail display.	6000K	The coldest, close to daylight. Display cabinets, signage and workshop benches.

Dimensions, description and handling

Dimensions, description and what arrives in the box

DIMENSIONS

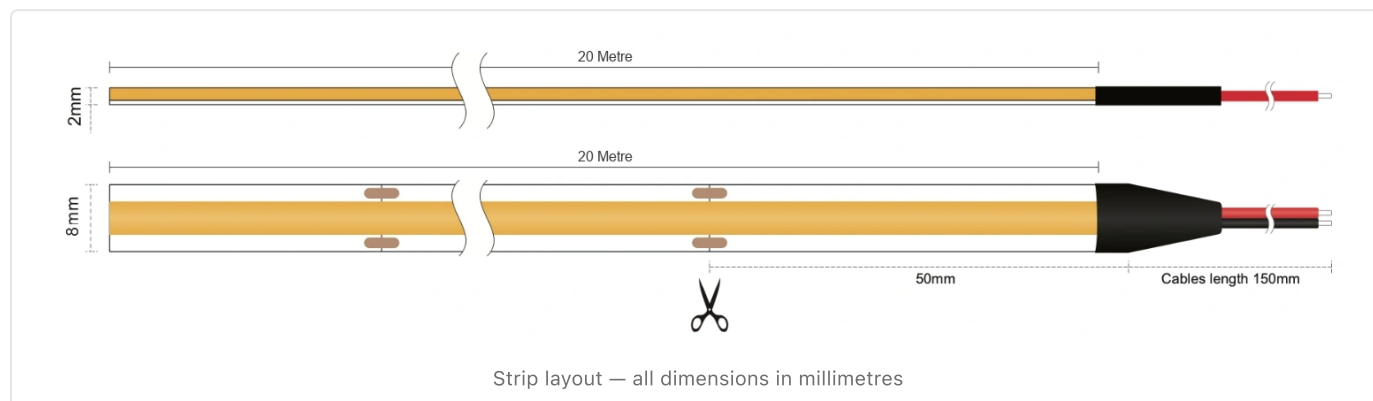

DESCRIPTION

An 8mm COB strip on 24V, running 480 chips per metre at 7.5W and 677 lumens. The emitting face is one continuous phosphor line, so it throws an even bar of light with no dots.

3000K is warm without going amber. It is the usual choice for kitchens, under-cabinet lighting and stair coving.


Cut every 50mm between the marked pads. One feed carries 20 metres, so most runs need a single driver at one end.

Every run is cut to length to your own measurement. We supply full bespoke lengths, so you order the metres the detail needs rather than trimming a fixed reel on site.

IN THE BOX

- COB strip, cut to length, with 1 × 150mm connection lead

WIRING DIAGRAM


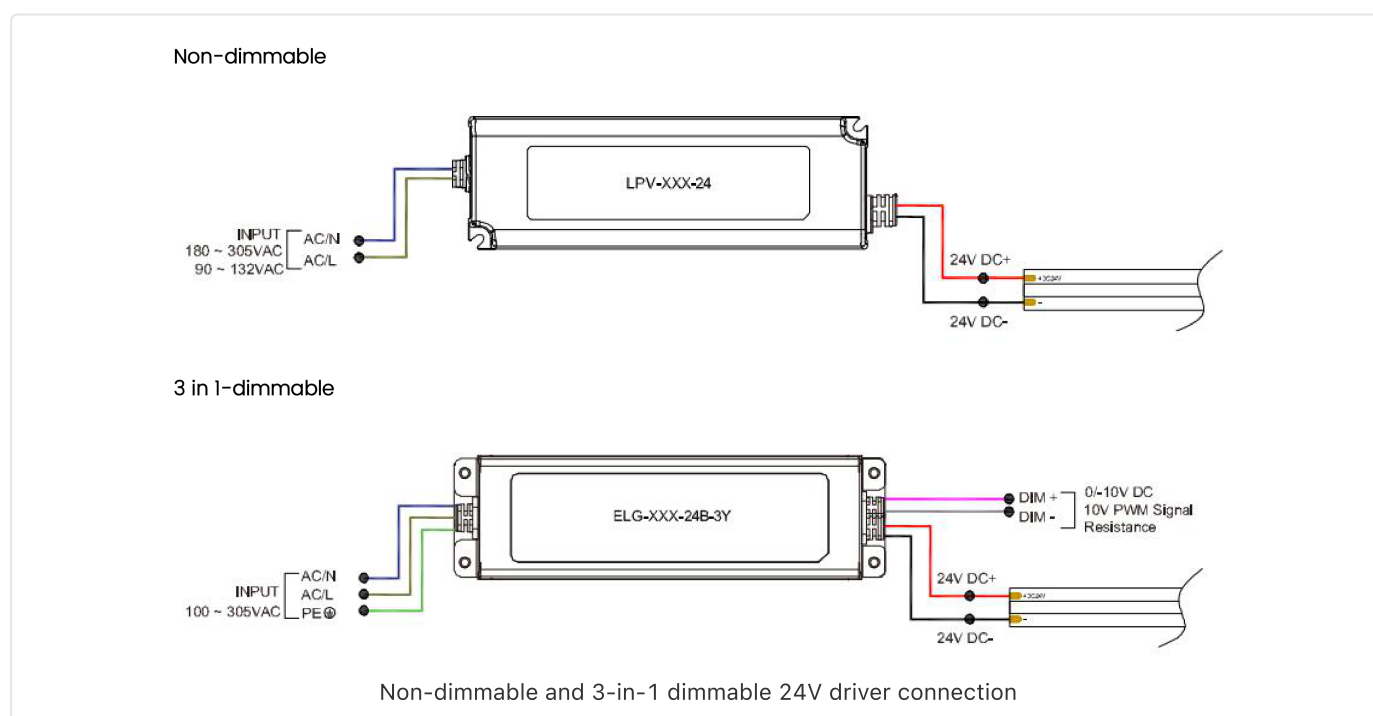


Cautions

Read before cutting, bending or powering the strip

HANDLING AND INSTALLATION

Cautions:

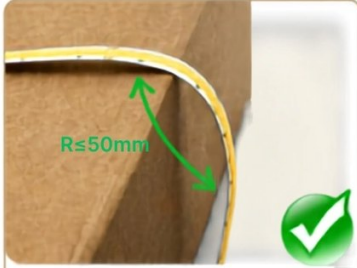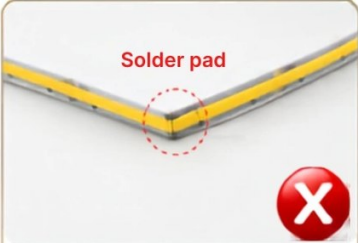 1 Straighten the COB tape light vertically during normal service.	 2 Radius of torsion $\geq 20\text{MM}$, Angle of torsion: 1080°	 3 During normal service, once need a turning, must hold the curve of COB tape light with its front side up and back side down. (Attention: keep the curved radiant $\geq 50\text{mm}$)
 4 Once need a turning, couldn't curved of 90 degree.	 5 Do not bend at the solder pad.	 6 The COB tape light can not be removed all from the reel, then install from the front end.

SAFETY WARNINGS


- Do not connect a 12V or 24V strip directly to 220–240V mains. The LEDs are destroyed instantly.
- Where the strip has leads at both ends, connect one end to the driver and leave the other pair disconnected. Bridging both shorts the circuit and risks damaging the run.
- Never power the strip while it is still coiled on the reel. Heat builds in the coil, lifts the adhesive and is a fire risk.
- The strip is static-sensitive. Wear an anti-static wrist strap or gloves when handling it.

If you require any advice for your project, feel free to get in touch — our technical team is here

Compatible profiles

Aluminium channel and silicone covers this 8mm strip fits, and the lengths each is stocked in

ALUMINIUM AND SILICONE PROFILES THIS STRIP FITS

 SURFACE ALPROFILE-509 17 × 8mm 1m · 2m (PROF-509-2M)	 SURFACE PROF-1210B-1M 12 × 10mm 1m · 2.45m	 RECESSED ALRPROF25X7X12-508 25 × 7mm 1m · 2m	 RECESSED ALPROFILE613B 24 × 14.2mm 1m
 CORNER CP16X16MM-1M-WH 16 × 16mm 1m · 2m	 CORNER PROFILE614 19 × 19mm 1m · 2m (CP1919-2M)	 PLASTER-IN S-PIP-P1513-1M 55.5 × 13mm 1m · 2m · 2.45m	 PLASTER-IN B-PIP-P2015-2M bendable 2m · 3m
 T1510 15 × 10mm 1m to 8m+	 T1616 16 × 16mm 1m to 8m+	 T2010 20 × 10mm 1m to 8m+	 SD1220 12 × 20mm 1m to 8m+

12 of the 42 profiles that take an 8mm strip are shown. Aluminium profiles are separate products per length; silicone covers are one product sold by the metre. If you are unsure which