

## Bendable Tile-In Aluminium Profile for 10 × 20 mm IP67 Neon Flex

For ATOM LED 24V and 48V Neon Flex - 1 metre and 2 metre lengths.

### SPECIFICATION

|                      |                                    |
|----------------------|------------------------------------|
| Product type         | Tile-in aluminium profile          |
| Profile form         | Bendable, segmented flange         |
| Length options       | 1 metre / 2 metres                 |
| Compatible Neon Flex | ATOM LED 10 × 20 mm IP67           |
| Compatible ranges    | 24V and 48V Neon Flex              |
| Overall width        | 34.10 mm                           |
| Overall height       | 19.80 mm                           |
| Channel opening      | 10.10 mm                           |
| Internal depth       | 17.80 mm                           |
| Walls / base         | 2.00 mm / 2.00 mm                  |
| Flange               | 20.00 mm projection; 1.50 mm thick |
| Material             | Aluminium                          |
| Supplied             | Aluminium profile only             |
| Warranty             | 7 Years                            |



### IN THE BOX


1 × selected bendable aluminium profile length.  
Neon Flex, opal cover, fixings and accessories are not included.

### DESCRIPTION

Bendable aluminium mounting channel with a segmented perforated flange for curved tile-in layouts using ATOM LED 10 × 20 mm IP67 Neon Flex. Select the 1 metre or 2 metre profile length required.

IP67 and voltage describe the compatible Neon Flex, not the bare aluminium profile. Check the selected Neon Flex bend direction and permitted bend radius. The completed installation needs suitable sealing, fixings and substrate preparation.

### DIMENSIONS

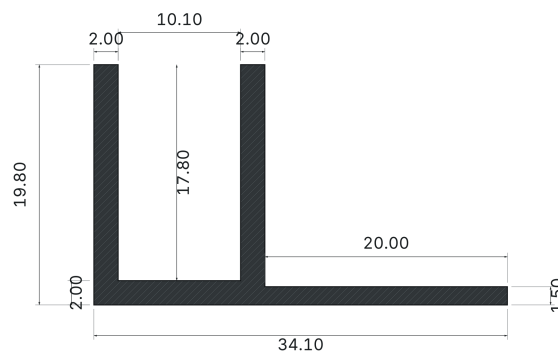

Section between relief slots - dimensions in mm.  
Not to scale; reference only.

Technical support: 01952 370008 | [sales@ukledlights.co.uk](mailto:sales@ukledlights.co.uk)