

Tile-In Aluminium Profile for 10 × 10 mm IP67 Neon Flex

Straight mounting channel for ATOM LED 24V and 48V Neon Flex - available in 1 metre and 2 metre lengths.

SPECIFICATION

Product type	Tile-in aluminium profile
Profile form	Straight and rigid
Length options	1 metre / 2 metres
Compatible Neon Flex	ATOM LED 10 × 10 mm IP67 range
Compatible ranges	24V and 48V Neon Flex
Overall width	34 ± 0.2 mm
Channel opening	10 ± 0.2 mm; 9.5 mm clear opening
Internal depth	9.9 ± 0.2 mm
Walls / base	2 mm / 2 mm
Flange	20 mm projection; 1.5 mm thick
Material	Aluminium
Supplied	Aluminium profile only
Warranty	7 Years



IN THE BOX

- 1 × selected straight aluminium profile length
- Neon Flex, opal cover, fixings and accessories are not included


DESCRIPTION

A straight aluminium mounting profile designed for recessed tile-in installation with ATOM LED 10 × 10 mm IP67 Neon Flex. Its single perforated flange sits beneath the tiled finish while the open channel supports the compatible Neon Flex.

Compatible with the ATOM LED 24V and 48V 10 × 10 mm IP67 Neon Flex ranges. The 1 metre and 2 metre options let the installer select the appropriate rigid profile length.

IP67 and voltage refer to the compatible Neon Flex, not the bare aluminium profile. The completed installation requires suitable sealing, drainage, fixings and substrate preparation for its location.

DIMENSIONS

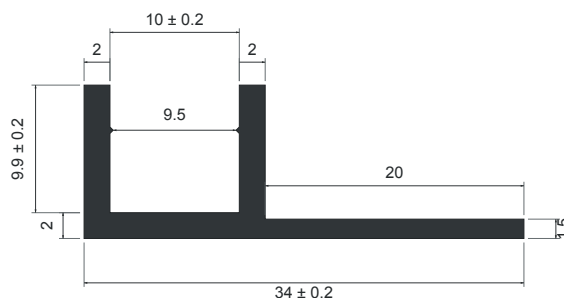

Cross-section - dimensions in millimetres
9.9 ± 0.2 mm is internal depth.
Not to scale; reference only

If you require any advice for your project, feel free to get in touch - our technical team is here Monday to Friday, 9am-5pm on 01952 Technical support: 01952 370008 | sales@ukledlights.co.uk