
TECHNICAL DOCUMENT

SP530E All in One DC5-24V WiFi and Bluetooth Controller


Product reference: SP530E-SPI

Original Brand document

The original technical pages follow this distributor cover and are preserved without changes to Brand identity, specifications, diagrams, certifications or claims.

Source file: SP530E-Manual.pdf

SP530E Instructions




SPI+5CH PWM All In One IoT LED Controller



1.Brief:

SP530E is a versatile IoT LED controller designed specifically for controlling various types of LED. It utilizes a dual-mode (2.4GHz WiFi and Bluetooth LE5.0) chip, enabling Bluetooth, WiFi, local network, or cloud connection via an App. It also supports RF remote control.



Furthermore, the SP530E has integrated with various smart home platforms, including **Alexa**, **Google Home**, **Xiao Ai**, and **Xiao Du**, allowing you to easily control your light through voice commands. SP530E offers limitless potential for lighting and ambiance needs, delivering a more intelligent, convenient, and personalized experience to you.

2.Features:

- ① Supports multiple control methods, including App control, smart speaker voice command control, and 2.4G RF remote control, providing users with flexible control options.

- ② All-new upgraded music effects, featuring multi-segment LED strip music effects and Matrix LED music spectrum effects.

- Multi-segment LED strip music effects: Users can configure multiple segments of music effects on the same LED strip, each segment of the strip can feature different music effects, various pixel counts, and can be tailored to correspond with low, mid, or high audio frequency ranges.
- Matrix LED music spectrum effects: Users can flexibly configure the size and wiring layout of a LED matrix, can set parameters for the falling dots and sound columns, such as color palette, saturation, direction, etc. Offering users even more unique music spectrum effects.
- Various music collection methods: Supports various music collection methods including phone microphone, player streaming, and onboard microphone.

- ③ Compatible with up to 12 different types of LED.
- ④ Supports power on/off dynamic effects setting, timer settings, playful on/off triggering settings, and default power-on status setting.
- ⑤ Supports OTA firmware upgrades, keeping the device in its optimal state.
- ⑥ Integrated with “BanlanX[®]” Cloud for stable IoT smart home cloud connections.

3.LED Type:

NO.	Parameters			LED Type
	RGB	CW	WW	
1				1CH PWM Single Color
2				2CH PWM CCT
3				3CH PWM RGB
4				4CH PWM RGBW

5				5CH PWM RGBCT
6				SPI Single Color
7				SPI CCT
8				SPI RGB
9				SPI RGBW
10				SPI RGBCT
11				SPI RGB+1CH PWM Single Color
12				SPI RGB+2CH PWM CCT

4.APP:



1. SP530E supports App control for iOS and Android devices.
2. Apple devices require iOS 10.0 or higher, and Android devices require Android 4.4 or higher.
3. You can search “BanlanX” in App Store or Google Play to find the APP, or scan the QR code to download and install.

Operations


- Open the App, click the in the top right corner of the home page to add device .
- Please set the LED type and calibrate the color order according to the page prompts, you can also change these settings on the settings page.
- Click the in the upper right corner of the App to enter the settings page, where you can modify the name, modify the type of LED, calibrate the color order, set the timings, set the on/off effect,etc.

5. 2.4G Touch Remote Control :

SP530E can be used with 2.4G touch remote control and 2.4G touch 86-type panel; There are 4 kinds of remote control, 4 kinds of 86-type panel; different type of LED match different remote and panel models:

1CH PWM Single Color	2CH PWM CCT	3CH PWM RGB	4CH PWM RGBW	5CH PWM RGBCT	SPI Single Color
SPI CCT	SPI RGB	SPI RGBW	SPI RGBCT	SPI RGB +1CH PWM	SPI RGB +2CH PWM CCT

Remote Models

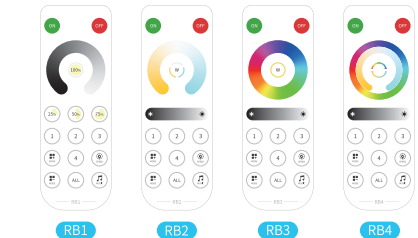

86-Type Panel Models



Touch Functions

ON	OFF	Brightness Level	Warm/Nature/ Cold White	White	Color HUE/ Temperature Ring
Brightness	Brightness	Brightness Ring	Temperature Ring	Color HUE Ring	Color HUE/ Temperature Ring
Speed	Mode+	Mode-	Music effect	1-4 Zones	All Zones

Note: 1.Within 20s after power on, long press the ON key: binding/unbinding the remote/panel;
2.Within 20s after power on, long press Zone1~4/ZoneAll, to set the Zones;

6.Technical Parameters:

SP530E

Working Voltage: DC5V~24V	Working Current: 20mA~85mA
PWM Single Channel Maximum Output Current: 6A	PWM Total Maximum Output Current : 12A
Working Temp: -10°C~60°C	DIMensions: 78mm*56mm*20mm

2.4G Remote/Panel

Working Voltage: 3V[CR2032]	Quiescent Current: 36uA
RF frequency: 2.4GHz	Remote Range: 30M
Remote DIMensions: 135mm*48mm*10mm	Panel DIMensions: 86mm*86mm*12mm

7.Wiring:

Different types of LED correspond to different output ports; The ports should match the selected LED type, and the specific port descriptions as follows:

LED Type	Output Port							
	VCC	R	G	B	CW	WW	DAT	GND
1 1CH PWM Single Color	✓				✓	✓		
2 2CH PWM CCT	✓				✓	✓		
3 3CH PWM RGB	✓	✓	✓	✓				
4 4CH PWM RGBW	✓	✓	✓	✓	✓			
5 5CH PWM RGBCT	✓	✓	✓	✓	✓	✓		
6 SPI Single Color	✓						✓	✓
7 SPI CCT	✓						✓	✓
8 SPI RGB	✓						✓	✓
9 SPI RGBW	✓						✓	✓
10 SPI RGBCT	✓						✓	✓
11 SPI RGB+1CH PWM Single Color	✓				✓	✓	✓	✓
12 SPI RGB+2CH PWM CCT	✓				✓	✓	✓	✓



Download The APP



Electronic Manual