

Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 80W

TRIAC Dimmable Driver Series 80W

Series: TRIAC-12VIP66-80W | TRIAC-24VIP66-80W | TRIAC-48VIP66-80W



Features

Output:	Constant Voltage
Range:	200-240VAC
PFC design:	Built-in active PFC function
Efficiency:	Up to 86%
Protections:	Short circuit/ over load/ over temperature
Heat dissipation:	Cooling by free air convection
Waterproof performance:	IP66
Dimming function:	<u>Phase dimming</u> : work with leading edge, MLV and trailing edge, ELV, TRIAC dimmers.
Dimming range:	0-100%
Application:	Suitable for the application of LED lighting
Warranty:	5 years warranty




Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 80W

Specification


Model		TRIAC-12VIP66-80W	TRIAC-24VIP66-80W	TRIAC-48VIP66-80W
Certificate		ENEC / SAA(GMA certificate) / CCC / CE / CB / RoHS / Reach		
Output	DC Voltage	12V	24V	48V
	Voltage Tolerance	±0.5V		
	Voltage Regulation	≤2%	≤1%	
	Rated current	6.67A	3.33A	1.67A
	Rated power	80W		
	Load Regulation	≤0.5%		
Input	Voltage Range	200-240VAC		
	Frequency Range	47 - 63Hz		
	Power Factor	PF≥0.97@200VAC PF≥0.97@230VAC PF≥0.97@240VAC		
	THD(Typ.) @ full load	≤20%@200VAC @230VAC @240VAC		
	Efficiency @ full load	82%	83%	86.43%
	AC Current(Max.)	0.8A		
	Inrush Current (Typ.)	56A,280us@230VAC		
	Leakage current	<0.5mA		
Protection	Short Circuit	Shut down o/p voltage, re-power on to recover after fault condition is removed		
	Over Load	≤120% constant current limiting,recovers automatically after fault condition is removed		
	Over temperature	Shell surface temp.100°C±10°C shut down o/p voltage,automatically recover after the temperature drops.		
Environment	Working TEMP.	-40~+60°C (see below derating curve)		
	Working Humidity	20 - 95%RH non-condensing		
	Storage TEM.,Humidity	-40 - +80°C,10 - 95% RH non-condensing		
	TEMP.coefficient	±0.03%/°C (0 - 50°C)		
	Vibration	10~500Hz, 5G 12min./1 cycle, period for 72min. each along X,Y,Z axes		
Safety & EMC	Safety standards	EN61347-1 EN61347-2-13 (EU)		
	Withstand voltage	I/P-O/P:3.75KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC (EU)		
	Isolation resistance	I/P-O/P:100MΩ / 500VDC / 25°C / 70%RH		
	EMC Emission	EN55015 EN61000-3-2 EN61000-3-3 (EU)		
	Others	Net Weight	1.04Kg	
Dimension		226*69.8*42mm (L*W*H)		
Packing		355*285*170mm 10pcs /CTN 11.41KG/CTN		
Notes	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.			
	2. Tolerance: includes set up tolerance and load regulation.			

Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 80W

Efficiency Curve (efficiency vs output load)

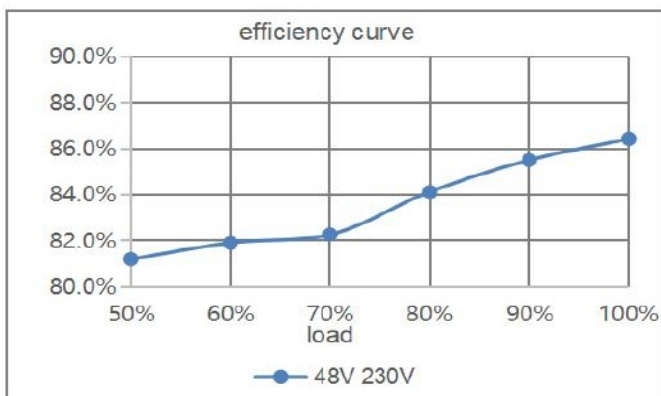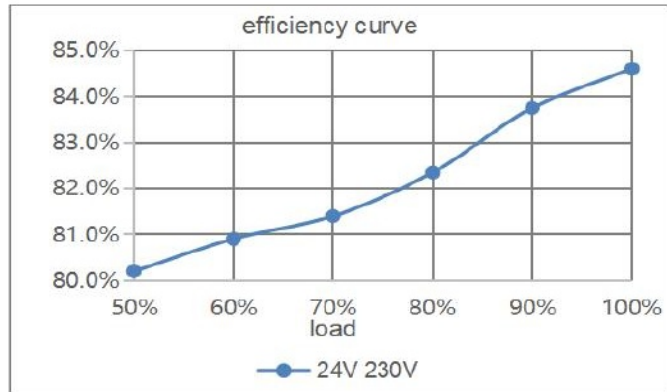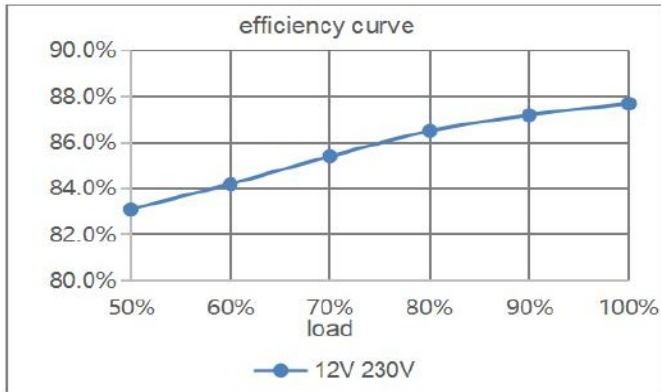




Derating Curve (output load vs TEMP.)

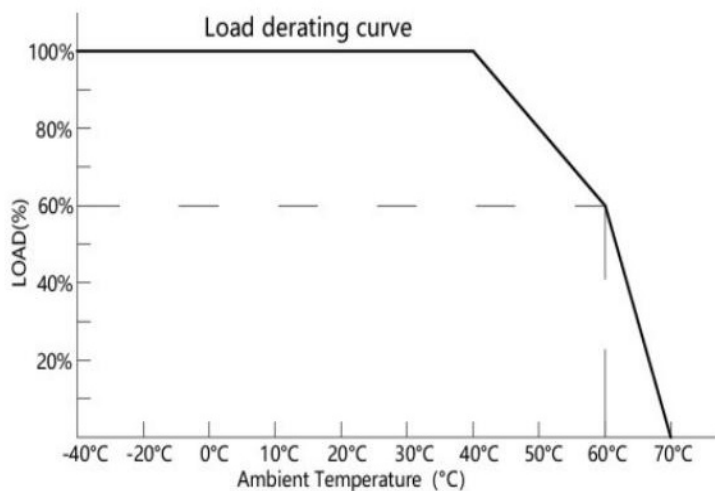

1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. Please note that the rise in temperature of LED fixtures over a long period of time will cause their power to rise. Therefore, we recommend the power supply to reserve a certain amount of load to avoid overloading.


Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 80W

Power Factor Curve

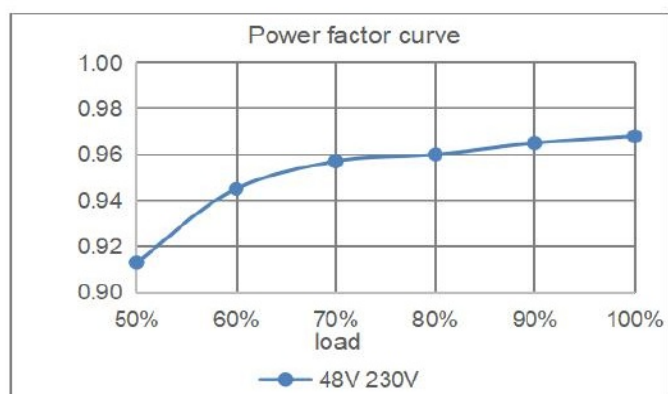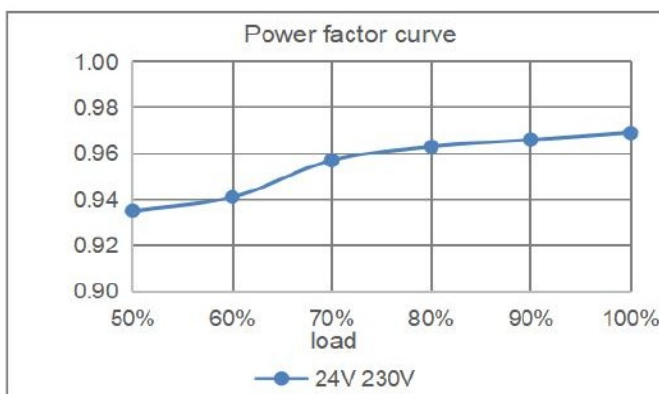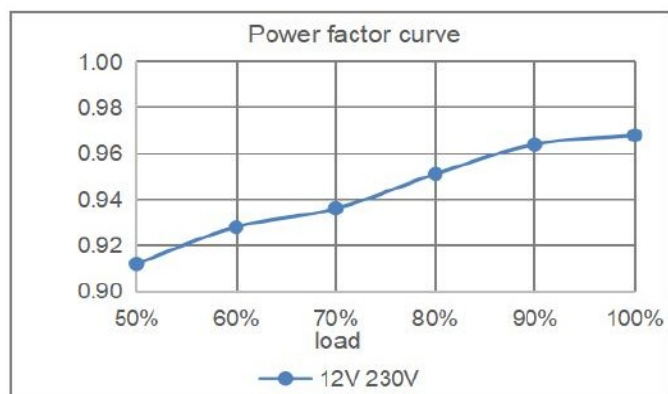

Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 80W

Mechanical Specification

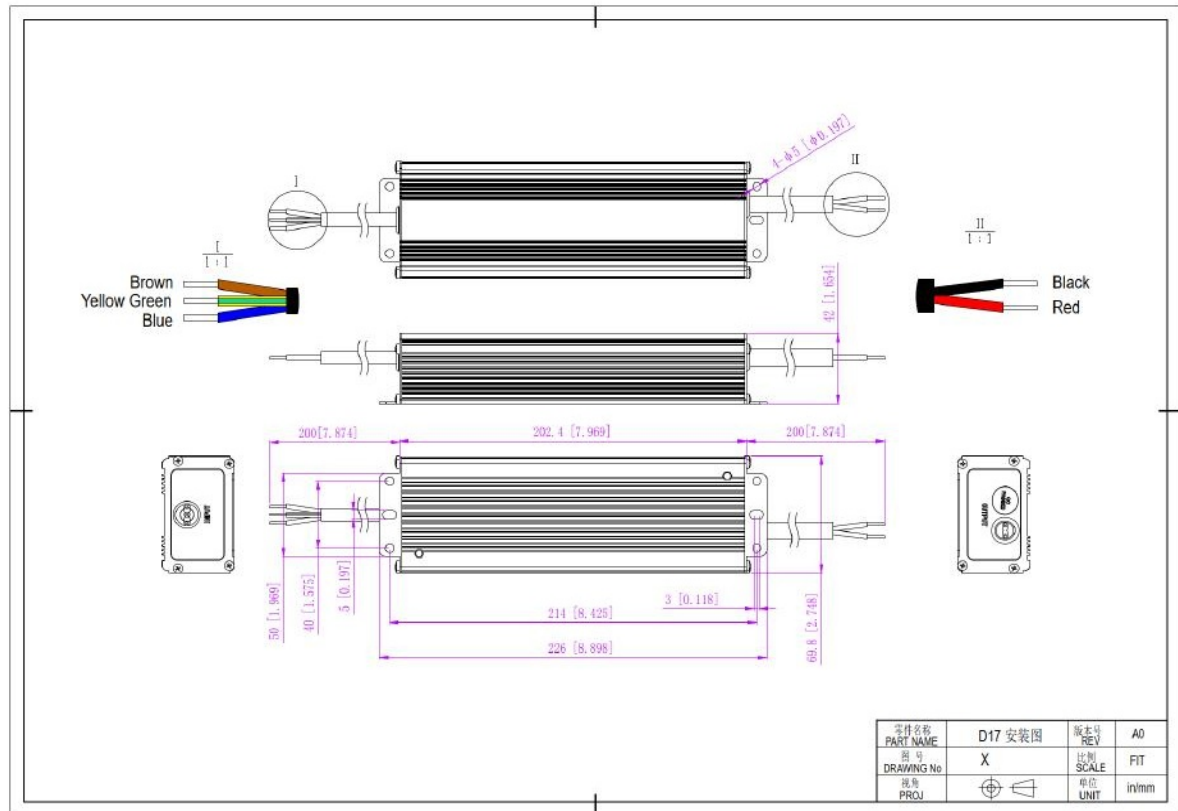

12V&24V&48V Version

1. Input Rubber cable H05RN-F 3*1.0mm², the Green /Yellow cable connect with (FG),Brown with AC (L),Blue with AC(N).
2. Output Rubber cable H05RN-F 2*1.0mm², Red is output (V+) Positive,Black is output (V-) negative.Connected to LED Lamps.
3. Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.

Warm tips:

1. Any other requests for, we can customized.

Have any questions? Please contact UK LED Lights - we're happy to help.
Please visit our website or contact us for more information.