

Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 150W

TRIAC Dimmable Driver Series 150W

Series: TRIAC-12VIP66-150W | TRIAC-24VIP66-150W | TRIAC-48VIP66-150W



Features

Output:	Constant Voltage
Range:	200-240VAC
PFC design:	Built-in active PFC function
Efficiency:	Up to 88%
Protections:	Short circuit/ over load/ over temperature
Heat dissipation:	Cooling by free air convection
Waterproof performance:	IP66
Dimming function:	<u>Phase dimming</u> : work with leading edge and trailing edge, TRIAC dimmers.
Dimming range:	0-100%
Application:	Suitable for the application of LED lighting
Warranty:	5 years warranty




Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 150W

Specification


Model		TRIAC-12VIP66-150W	TRIAC-24VIP66-150W	TRIAC-48VIP66-150W
Certificate		TUV / SAA(GMA certificate) / CCC / CE / CB / RoHS / Reach		
Output	DC Voltage	12V	24V	48V
	Voltage Tolerance	±0.5V		
	Voltage Regulation	±1%		
	Rated current	12.5A	6.25A	3.13A
	Rated power	150W		
	Load Regulation	≤0.5%		
Input	Voltage Range	200-240VAC		
	Frequency Range	47 - 63Hz		
	Power Factor @ full load	PF≥0.97@200VAC @230VAC @240VAC		PF≥0.95@230VAC
	THD(Typ.) @ full load	≤20%		
	Efficiency @ full load	87%@230VAC	86%@230VAC	88%@230VAC
	AC Current (Max.)	1.2A	1.2A	1A
	Inrush Current (Typ.)	72.8A,132us@50%Ipeak		
Protection	Leakage current	<0.5mA		
	Short Circuit	Hiccup mode, re-power on to recover after fault condition removed		
	Over Load	≤120% Hiccup mode, recovers automatically after fault condition is removed		
	Over temperature	Shell surface temp.100°C±10°C shut down o/p voltage,automatically recover after the temperature drops.		
Environment	Working TEMP.	-40~+60°C (see below derating curve)		
	Working Humidity	20 - 95%RH non-condensing		
	Storage TEM.,Humidity	-40 - +80°C,10 - 95% RH non-condensing		
	TEMP.coefficient	±0.03%/°C(0 - 50°C)		
	Vibration	10~500Hz, 5G 12min./1 cycle, period for 72 min. each along X,Y,Z axes		
Safety & EMC	Safety standards	EN61347-1 EN61347-2-13(EU)		
	Withstand voltage	I/P-O/P:3.75KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC (EU)		
	Isolation resistance	I/P-O/P:100MΩ / 500VDC / 25°C / 70%RH		
	EMC Emission	EN55015 EN61000-3-2 EN61000-3-3 (EU)		
Others	Net Weight	1.48Kg		
	Dimension	256*77.4*45.4mm(L*W*H)		
	Packing	390*315*185mm 10pcs /CTN 15.93KG/CTN		
Notes	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°Cof ambient temperature. 2. Tolerance: includes set up tolerance and load regulation .			

Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 150W

Efficiency Curve (efficiency vs output load)

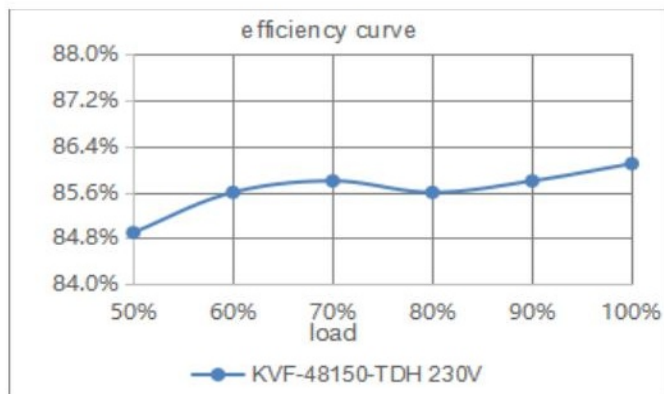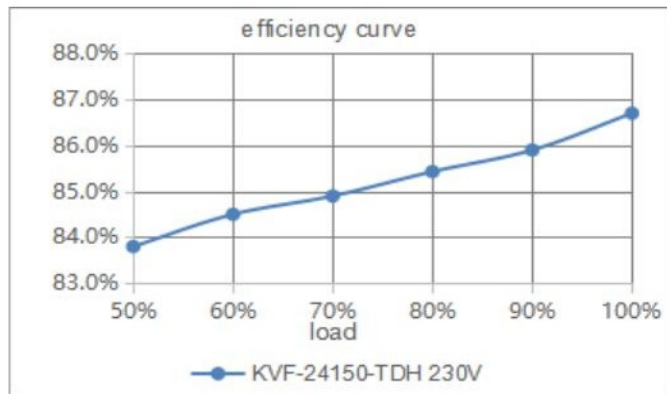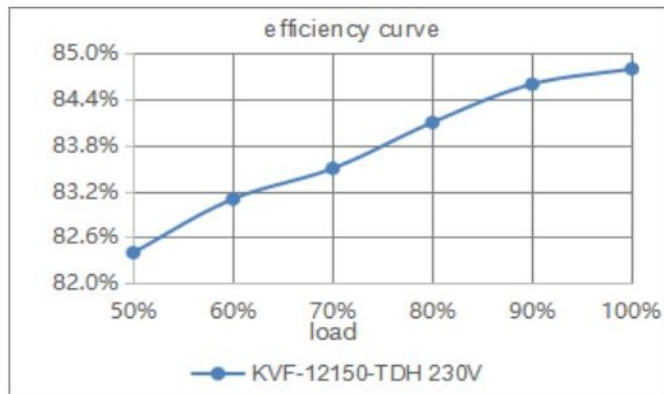




Derating Curve (output load vs TEMP.)

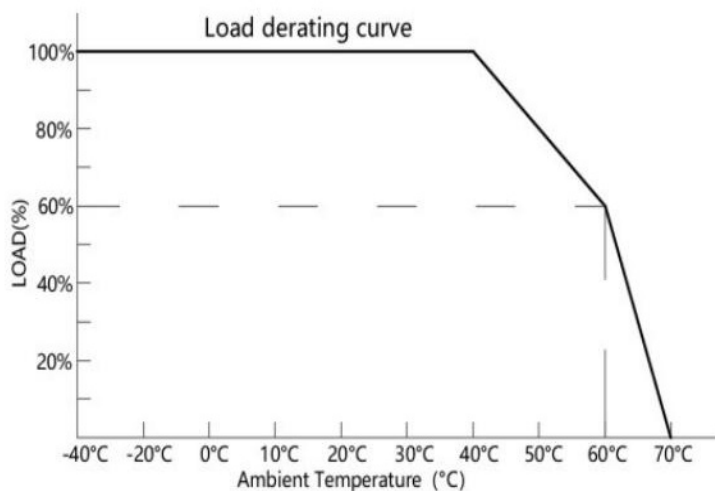

1. To extend their life, please refer to the Derating Curve and derate according to the temperature.
2. Please note that the rise in temperature of LED fixtures over a long period of time will cause their power to rise. Therefore, we recommend the power supply to reserve a certain amount of load to avoid overloading.


Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 150W

Power Factor Curve

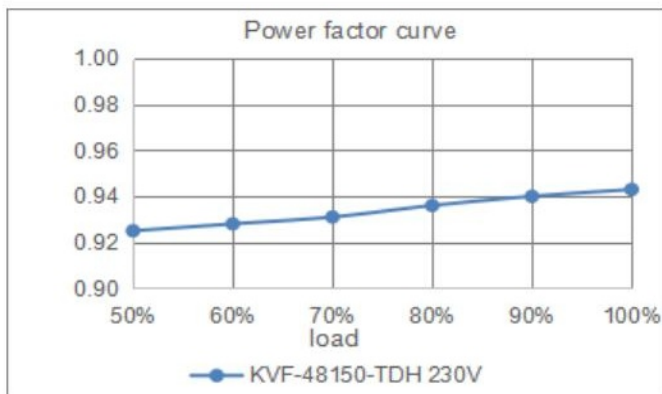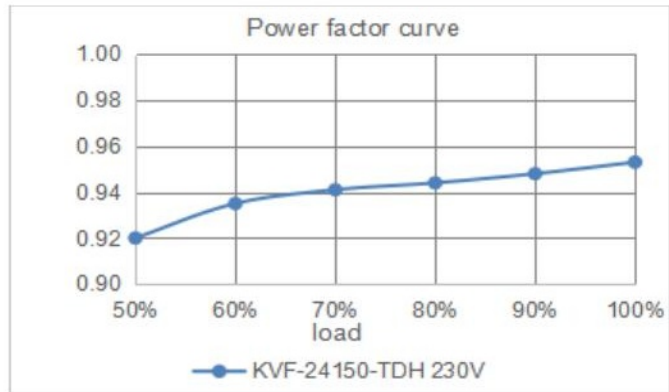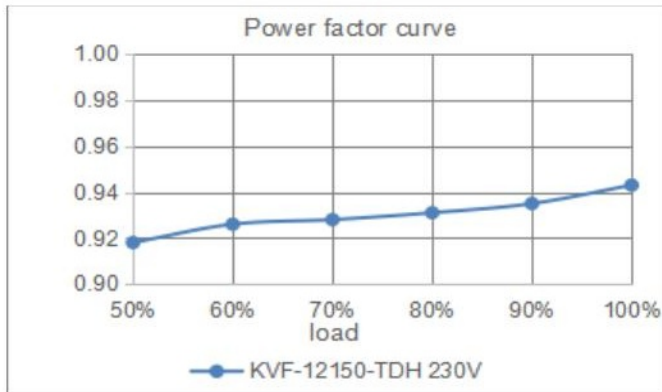


Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 150W

Mechanical Specification

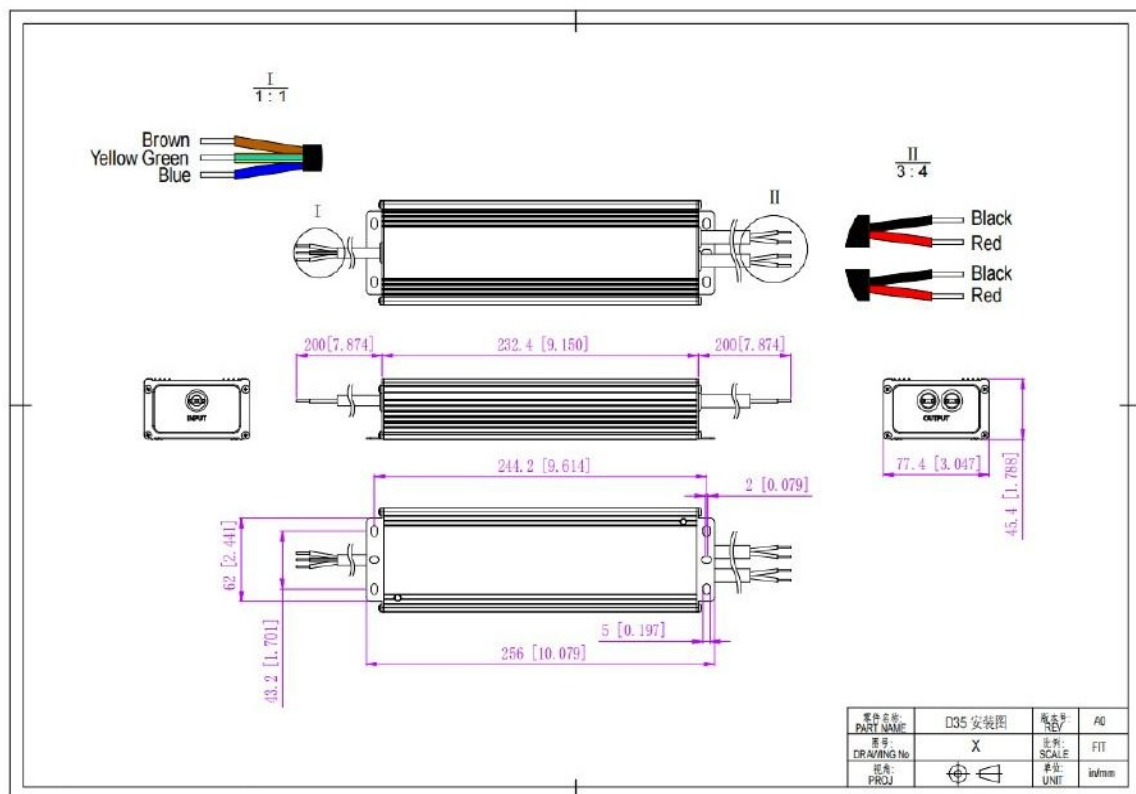

12V Version

Phase cut /Triac dimmable driver-PWM output Dimmable LED driver 150W

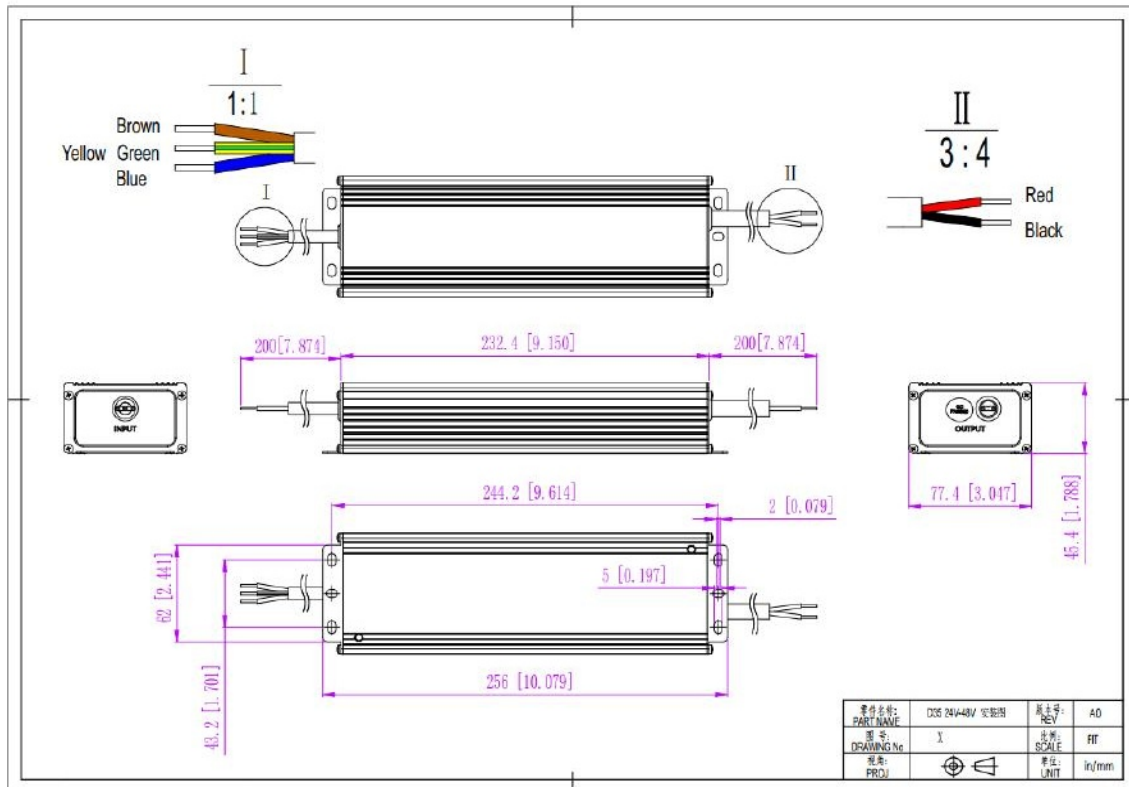

24V&48V Version

1. Input cable 3*1.0mm², the Green cable to (FG), Brown cable to L, and Blue cable to N of Mains AC.
2. Output cable 2*1.5mm², Red cable (+) to LED Positive side (+), Black cable (-) to LED Negative side (-).
3. Please make sure you connect these correctly otherwise your product will not function correctly and could be damaged.

Warm tips:

1. Any other requests for, we can customized.

Have any questions? Please contact UK LED Lights - we're happy to help.
Please visit our website or contact us for more information.