


Bendable Plaster-In Aluminium Profile for LED Strip — 2 Metre

Trimless plaster-in channel for LED strip up to 15mm, bendable on site.

SPECIFICATION

Profile type	Bendable plaster-in profile
Section	60.3mm × 15mm
Length	2 metres
LED strip size	Up to 15mm
Material	Anodised aluminium
Finish	Silver anodised
Diffuser	Opal
IP rating	IP20 — dry indoor only
Mounting	Plaster-in, recessed into plasterboard
Weight	600g
Guarantee	7 years

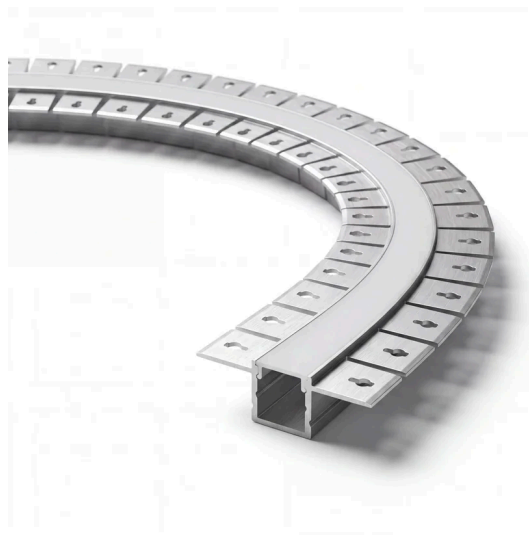

IN THE BOX

- 1 × 2 metre silver bendable plaster-in profile
- End caps
- Mounting clips and screws
- 1 × opal diffuser


DESCRIPTION

This 2 metre plaster-in channel takes LED strip up to 15mm wide in a 60.3 × 15mm aluminium section. The wide flange is a plaster key, so the profile is skimmed into the ceiling or wall and finishes with no visible trim.

Fix it to the framing before boarding, cut the plasterboard to butt against the flange, and skim over it so the detail reads as a slot cut into the plaster. It bends on site to a minimum radius of about 200mm.

Fit the diffuser after plastering and decorating, never before — plaster works into the retaining lips, dries hard, and the cover will then refuse to clip or sit unevenly. This is not a retrofit detail, and IP20 rules out bathrooms and outdoor positions.

DIMENSIONS

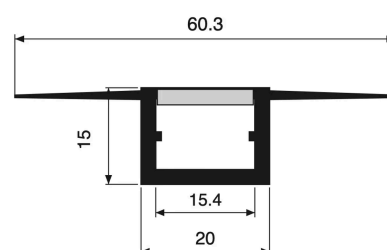

Bendable plaster-in · 60.3mm flange · 20 x 15mm body · 15.4mm channel, fits strip up to 15mm

Cross-section — all dimensions in millimetres

If you require any advice for your project, feel free to get in touch — our technical team is here Monday to Friday, 10am–5pm on 01952 370008 or sales@ukledlights.co.uk.