


3 Metre Bendable Plaster-in Aluminium LED Profile

Trimless plaster-in channel for LED strip up to 15mm, bendable on site.

SPECIFICATION

Profile type	Bendable plaster-in channel
Section	60.3mm flange · 20 × 15mm body
Length	3 metres
LED strip size	Up to 15mm (15.4mm channel)
Material	Anodised aluminium
Finish	Silver anodised
Diffuser	Opal, supplied
IP rating	IP20 — dry indoor only
Mounting	Plaster-in, recessed
Bend radius	Approx. 200mm minimum
Weight	900g
Guarantee	7 years

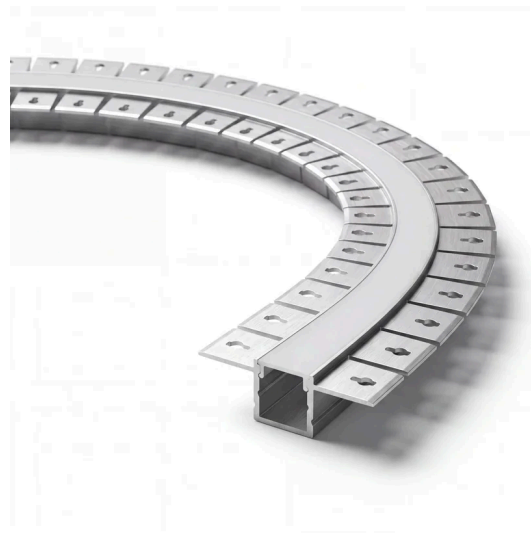

IN THE BOX

- 1 × 3m plaster-in profile
- End caps
- 1 × opal diffuser
- Mounting clips and screws

Includes 2 screw sets: 4 screws + 4 wall plugs.


DESCRIPTION

This 3 metre plaster-in channel takes LED strip up to 15mm wide in a 60.3 × 15mm aluminium section. The wide flange is a plaster key, so the profile is skimmed into the ceiling or wall and finishes with no visible trim.

Fix it to the framing before boarding, cut the plasterboard to butt against the flange, and skim over it so the detail reads as a slot cut into the plaster. It bends on site, so curved bulkheads follow the set-out without a bespoke section.

Fit the diffuser after plastering and decorating, never before — plaster works into the retaining lips, dries hard, and the cover will then refuse to clip or sit unevenly. This is not a retrofit detail, and IP20 rules out bathrooms and outdoor positions.

DIMENSIONS

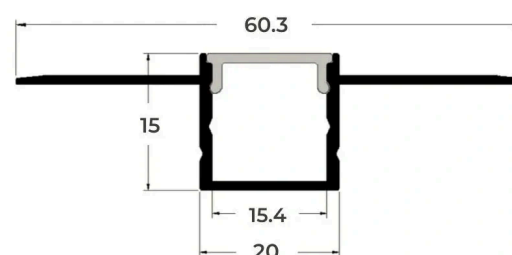

Cross-section — all dimensions in millimetres

If you require any advice for your project, feel free to get in touch — our technical team is here Monday to Friday, 9am–5pm on

UK LED Lights Ltd | Unit D4, Stafford Park 4, Telford TF3 3BA | 01952 370008 | sales@ukledlights.co.uk | www.ukledlights.co.uk